

## EROSION CONTROL NOTES

- I. EXPOSED EARTHWORK SHALL BE CONFINED TO AS LIMITED AN AREA AS IS PRACTICAL AT ANY GIVEN TIME THROUGHOUT THE CONSTRUCTION SEQUENCE. LIMIT OF WORK IS NOTED ON THIS SHEET. CONTRACTOR TO WORK WITHIN THESE LIMITS AS SHOWN. NO AREA OF THE SITE SHALL BE LEFT IN AN UNSTABILIZED CONDITION FOR A PERIOD OF TIME EXCEEDING FIVE CALENDAR DAYS.
- 2. TEMPORARY EROSION CONTROL MEASURES SHALL BE INSTALLED IN STRICT ACCORDANCE WITH PROJECT PANS. IN ADDITION SIMILAR MEASURES SHALL BE INSTALLED WHERE AND WHEN THE FIELD CONDITION, OR FIELD OPERATION OF THE INDIVIDUAL SITE CONTRACTOR MAY WARRANT. ALL TEMPORARY EROSION CONTROL MEASURES USED SHALL BE INSPECTED WEEKLY AND WITHIN 24 HOURS AFTER 0.5" OF RAINFALL OR MORE. THEY SHALL BE CLEANED AND MAINTAINED AND OTHERWISE KEPT IN AN EFFECTIVE OPERATING MANNER THROUGHOUT THE CONSTRUCTION PERIOD.
- 3. ALL DISTURBED AREAS DESIGNATED TO BE TURF SHALL RECEIVE A MINIMUM OF 4" LOAM (COMPACTED THICKNESS), PRIOR TO SEEDING AND MULCHING.
- 4. ALL SWALES AND DITCH LINES SHALL BE PERIODICALLY CLEANED OF DEPOSITED SEDIMENT SO AS TO MAINTAIN AND EFFECTIVE GRADE AND CROSS SECTION. ALL SWALES AND DITCH LINES SHALL BE FULLY STABILIZED PRIOR TO HAVING STORMWATER DIRECTED TOWARDS THEM.
- 5. IN THE EVENT THAT, DURING CONSTRUCTION OF ANY PORTION OF THIS PROJECT, A WINTER SHUTDOWN IS NECESSARY, THE CONTRACTOR SHALL STABILIZE ALL INCOMPLETE WORK AND PROVIDE FOR SUITABLE METHODS OF DIVERTING RUNOFF IN ORDER TO ELIMINATE SHEET FLOW ACROSS FROZEN
- G. AN AREA SHALL BE CONSIDERED STABILIZE IF ONE OF THE FOLLOWING HAS OCCURRED:

  A. BASE COURSE OF GRADES ARE INSTALLED IN AREAS TO BE PAVED;
- B. A MINIMUM OF 85% VEGETATIVE GROWTH HAS BEEN ESTABLISHED;
- C. A MINIMUM OF 3" OF NON-EROSIVE MATERIALS, SUCH AS STONE OR RIP-RAP HAS BEEN INSTALLED; AND/OR
   D. EROSION CONTROL BLANKETS HAVE BEEN PROPERLY INSTALLED
- INSTALLED.

  7. DUST SHALL BE CONTROLLED BY THE USE OF WATER AS NECESSARY THROUGHOUT THE CONSTRUCTION PERIOD.
- 8. IN NO WAY ARE THE TEMPORARY EROSION CONTROL
  MEASURES INDICATED ON THESE PLANS CONSIDERED ALL
  INCLUSIVE. THE CONTRACTOR SHALL USE JUDGMENT IN
  INSTALLING SUPPLEMENTARY EROSION CONTROL MEASURES
  WHERE AND WHEN SPECIFIC SITE CONDITIONS AND/OR
  CONSTRUCTION METHODOLOGIES MAY WARRANT.
- 9. ALL EROSION CONTROL METHODS TO BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS AS WELL AS INDICATED IN THE NEW HAMPSHIRE STORMWATER MANUAL "EROSION AND SEDIMENT CONTROL DURING CONSTRUCTION."
  10. ALL ROADS, PATHS, DRIVEWAYS, PATIOS AND POOL DECKS
- IO. ALL ROADS, PATHS, DRIVEWAYS, PATIOS AND POOL DECKS
  SHALL BE STABILIZED WITHIN 72 HOURS OF ACHIEVING FINISH
  GRADE
- I I . ALL CUT AND FILL SLOPES SHALL BE STABILIZED WITHIN 48 HOURS OF ACHIEVING FINISH GRADE.



planning & design llc

311 kast hill road hopkinton nh 03229 603. 746. 3512 terrainplanning.com

## DALY RESIDENCE

Site Location: 190 Piscataqua Road Durham, NH 03824 Tax Map: 12 Lot #:7

Prepared For:
Thomas J. Daly Rev. Trust &
Erin L. Daly Rev. Trust
Thomas J. & Erin L. Daly,
Trustees
5 Jasper Lane
Nashua, NH 03063

## GEO-THERMAL WELL PLAN

DATE: 09 - 17 - 2021

SCALE: 1" = 20'

PROJECT #: 1979

Checked By: CGB

Drawn By: ERB

REVISIONS: DATE:

Revised per Shoreland comments 12-02-21 Issued for Bidding


01-06-22
Revised grading
01-13-22
Revised

Revised Geo-Thermal

04/11/22

02-11-22



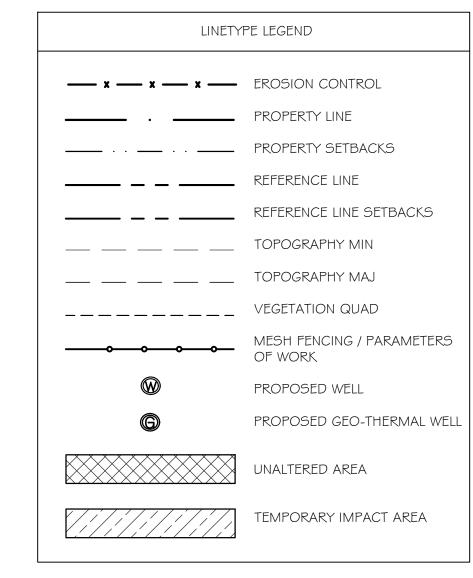

This plan is the property of
Terrain Planning & Design LLC.
Use or reproduction of this plan
by any means without
permission or purchase from
Terrain Planning & Design LLC
is prohibited.

G - 01

